

Fig. 3226




**Valve Standard :**  
Comply with AWWA C509

**Pressure Temperature Ratings**

Working pressure	200psi
Testing Pressure	Shell:300psi Seal:220psi
Working Temperature	-4°F to 230°F EPDM 14°F to 176°F NBR

**Material Specification**

Part	Material	ASTM
Body	Ductile Iron	A536 Gr. 65-45-12
Bonnet	Ductile Iron	A536 Gr. 65-45-12
Disc	EPDM Coated DI	A536 Gr. 65-45-12
Stem	Stainless Steel	AISI 420
O-Ring	EPDM / NBR	Commercial
Wrench Nut	Ductile Iron	A536 Gr. 65-45-12

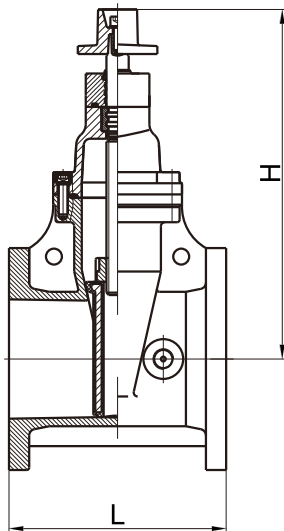

**Dimensions**

DN	inch	50	65	80	100	125	150	200	250	300	350	400	450	500	600
L		178	190	203	229	254	267	292	330	356	381	406	432	457	508
H		270	283	311	352	435	485	520	632	745	835	953	1120	1320	1445